

NOTES: UNLESS OTHERWISE SPECIFIED

1. INTERPRET DRAWING IN ACCORDANCE WITH ANSI Y14.5-1982.

2 MATERIAL: C51000 PHOS. BRONZE, 3/4 HARD, ASTM B159.

3 FINISH: .000030" MIN. GOLD, ASTM B488, TYPE 2, CODE C, OVER .000100" MIN. NICKEL, SAE AMS 2403, PER AUTOSPLICE SPEC-0002.

4 PART TO SUPPLIED ON A CONTINUOUS REEL.
PARTS PER REEL: 50,000 PCS

5. ALL DIMENSIONS APPLY AFTER PLATING.


6. SOLDERABILITY SHALL BE TESTED IN ACCORDANCE WITH J-STD-002.

7. RECOMMENDED DRILL HOLE: $\phi.032 \pm .001$
WITH 1oz COPPER PLATING: $\phi.028 \pm .002$
TIN/LEAD FINISHED HOLE: $\phi.027 \pm .002$

8. REFERENCE: BULOVA 508370, US ARMY 12991751



4 REELING ORIENTATION

AP/2 REEL
(24" O.D. x 20" I.D.)

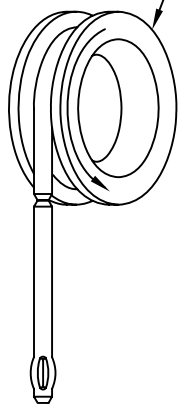

CUSTOMER DRAWING

REV	REVISION RECORD	ECN	BY	APVD	DATE
A	INITIAL RELEASE PER CDR 300362	501646	RJB	RJB	7-20-01
-	-	-	-	-	-

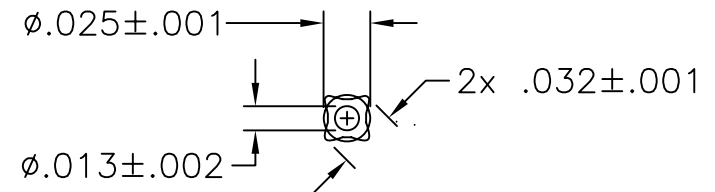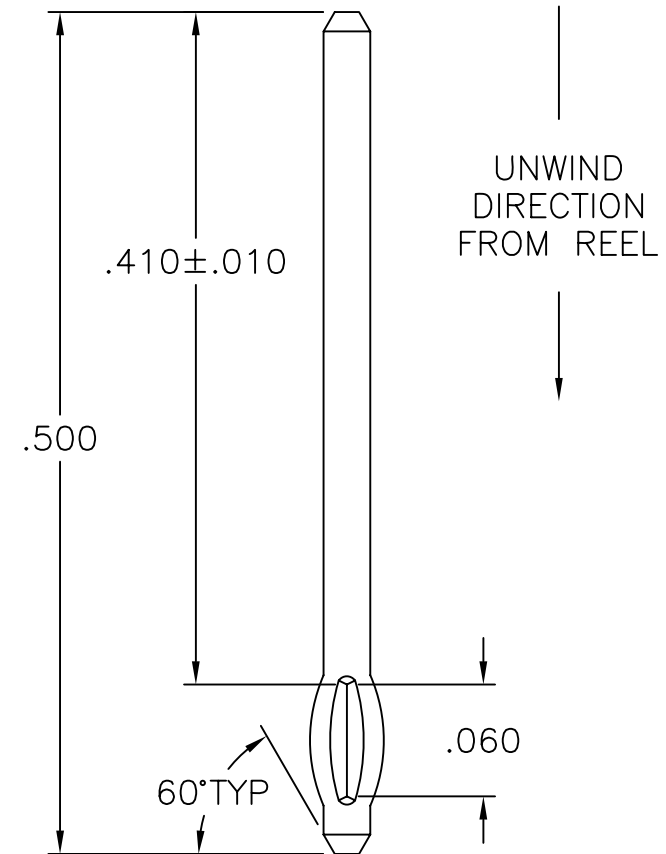

This drawing and the information set forth hereon are the property of Autosplice, Inc. and are to be held in trust and confidence. Publication, duplication, disclosure, or use for any purpose not expressly authorized in writing by Autosplice, Inc. is prohibited.

MATERIAL
2
FINISH
3

TOLERANCES UNLESS OTHERWISE SPECIFIED DIMS IN INCHES		autosplice® AUTOSPLICE INC. 10121 Barnes Canyon Road San Diego, California 92121 (619) 538-0077	
DECIMAL: XX = $\pm .01$ XXX = $\pm .005$	THIRD ANGLE PROJECTION	DRAWN BY Badger	DATE 07-12-01
ANGULAR: $\pm 2^\circ$	TITLE .025 RD. SPECIAL STAR PIN	ENGINEERED BY Badger	DATE 07-12-01
DENOTES SPECIAL CHARACTERISTIC	SIZE A	PICN NO. 0AE89	DRAWING NUMBER C8-00-0241
	SCALE: NONE	CAD FILE NO. C8-00-0241D.DWG	REVISION A

A