

4

3

2

1

NOTES: UNLESS OTHERWISE SPECIFIED

1. INTERPRET DRAWING IN ACCORDANCE WITH ANSI Y14.5-1994.

2 MATERIAL: C51000 PHOS BRONZE, FULL HARD, .0200±.0010 THICK.

3 FINISH: POST PLATED "AA" .000120" MIN TIN/LEAD OVER .000050" MIN NICKEL.
"TT" .000120" MIN 100%TIN OVER .000050" MIN NICKEL.

4 QUANTITY PER REEL MUST BE WITHIN THE WEIGHT LIMIT OF 20 Lbs.

5. DIMENSIONS SHOWN ARE BEFORE PLATING.


6. ALL RADII TO BE .015 MAX.

7. .003 MAX BURR, EXCEPT ON COINED SURFACES.

8. DELETED.


9. TERMINAL MUST MEET SOLDERABILITY
REQUIREMENT OF MIL STD 202, METHOD 208.

10. RECOMMENDED PUNCHED HOLE:

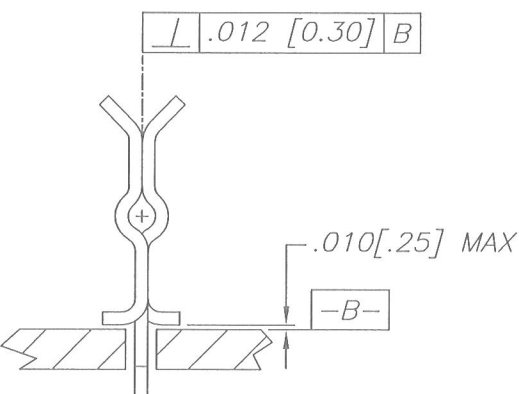


ASS'Y DETAIL



REELING ORIENTATION

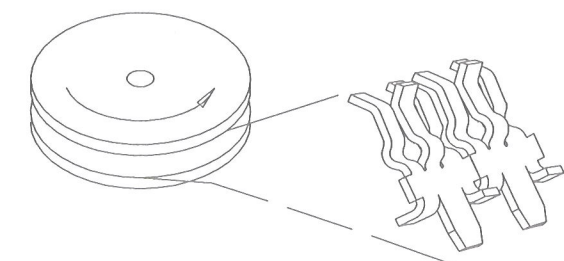

UNWIND DIRECTION

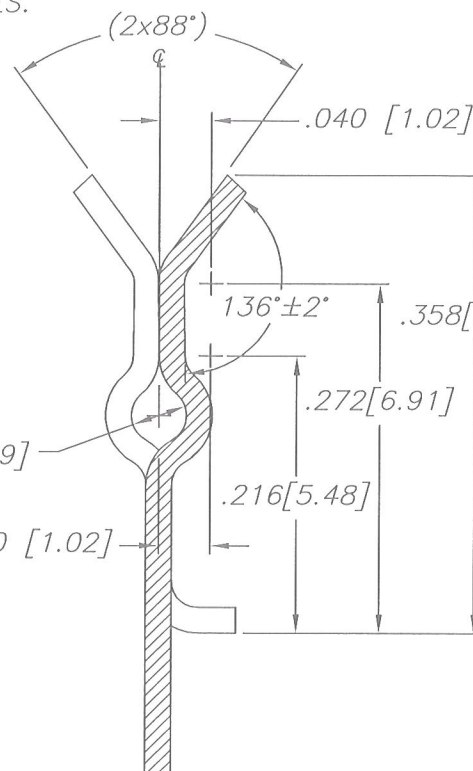

SECTION Y-Y

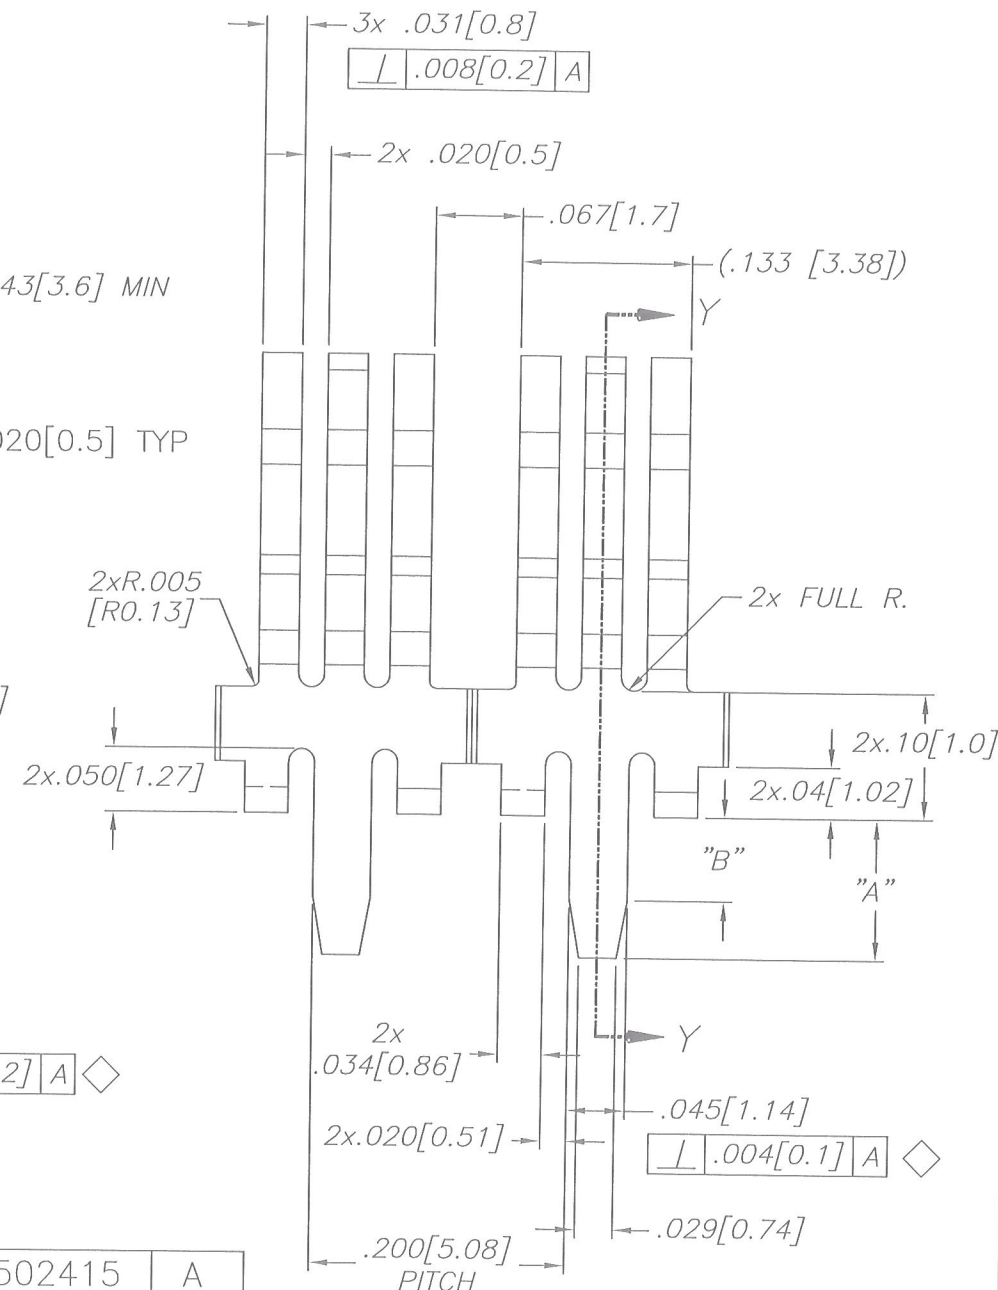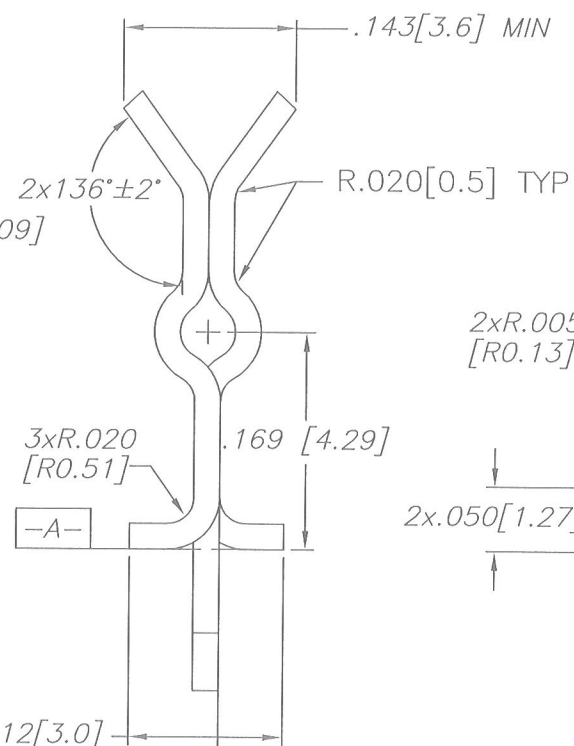

7-V1016-015[]	.082 [2.08]	.057 [1.45]	502415	A
7-V1016-005[]	.110 [2.79]	.065 [1.65]	15482	E
PART NUMBER	"A"±.005	"B"	ECN NO	REV

This drawing and the information set forth hereon are the property of Autossplice, Inc. and are to be held in trust and confidence. Publication, duplication, disclosure, or use for any purpose not expressly authorized in writing by Autossplice, Inc. is prohibited.

MATERIAL

2

FINISH

3

TOLERANCES
UNLESS OTHERWISE SPECIFIED
DIMS IN INCHES
DECIMAL: XX=±.02
XXX=±.010
ANGULAR:
±2°

◇ DENOTES SPECIAL
CHARACTERISTIC

autossplice®		AUTOSPLICE INC.	
10121 Barnes Canyon Road		San Diego, California 92121	
(619) 535-0077			
THIRD ANGLE PROJECTION		DRAWN BY JB	
ENGINEERED BY J.B.		DATE 10/10/97	
TITLE RIGITAB CLIP			
SIZE C	PSCM NO. 0AE89	DRAWING NUMBER C7-V1016-0[]5[]	REVISION H
SCALE: 10:1 CAD FILE NO. C7-V1016-0[]5h.DWG SHEET 1 OF 1			

REV	REVISION RECORD	ECN	BY	APVD	DATE
E	TYP0 ERROR 1.43 s/b .143	15482	JB	JB	5-20-98
F	ADD NEW ITEM PER EWR 102339	502415	JB	JB	10-2-23
G	ADD "TT" PLTG PER EWR 103388	502986	JB	JB	11-5-03
H	UPDATE PER EWR 107462	506387	RJB	PVB	2-12-10

CUSTOMER DRAWING